
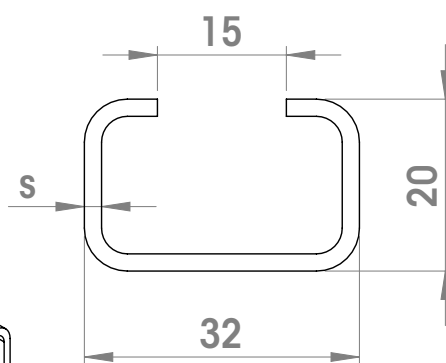


# PROFILI DI ANCORAGGIO

32/20

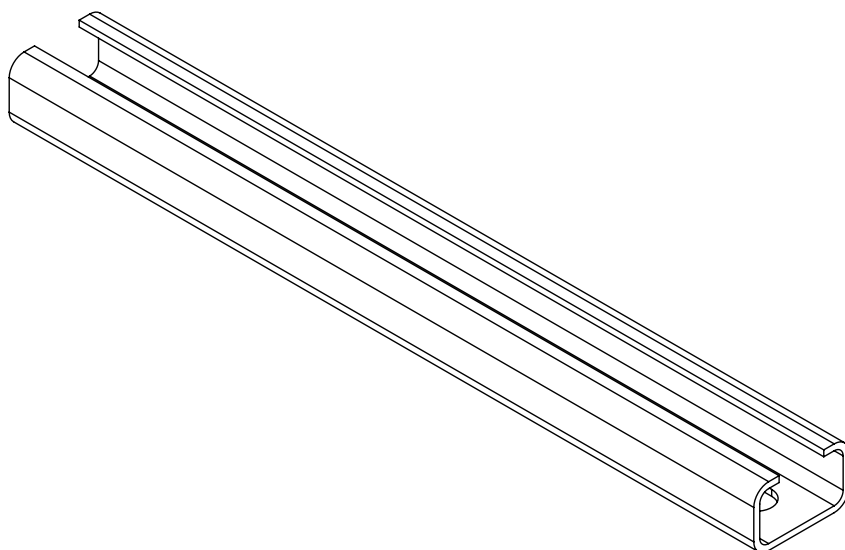

s	2,5 mm	
L [mm]	F [daN]	f [mm]
500	92	1,27
750	61	2,85
1000	45	5,00
1250	29	6,25
1500	20	7,50
1750	15	8,75
2000	11	10,00
2500	7	12,50
3000	5	15,00
3500	4	17,50
4000	3	20,00

$f \leq L/200$   
1 daN = 1 kg

s	2,5 mm
A [cm <sup>2</sup> ]	1,59
I <sub>y</sub> [cm <sup>4</sup> ]	0,9
W <sub>y</sub> [cm <sup>3</sup> ]	0,82
σ <sub>amm.</sub> [N/mm <sup>2</sup> ]	140

