

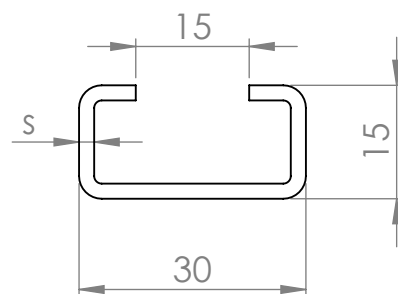


PROFILI DI ANCORAGGIO

30/15

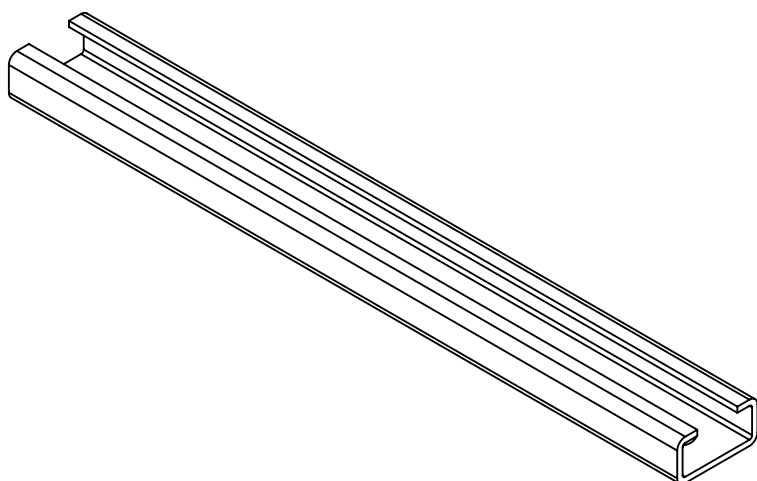

s	1,5 mm	2,0 mm
A [cm ²]	1,04	1,08
I _y [cm ⁴]	0,29	0,31
W _y [cm ³]	0,36	0,39
amm. [N/mm ²]	140	140

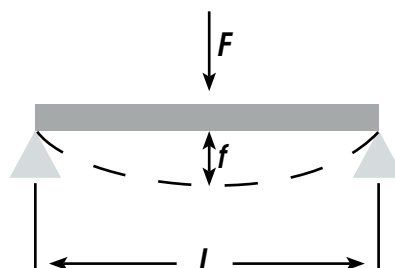

s	1,5 mm		2,0 mm	
	F [daN]	f [mm]	F [daN]	f [mm]
L [mm]				
500	40	1,72	44	1,75
750	26	3,75	28	3,75
1000	15	5,00	16	5,00
1250	9	6,25	10	6,25
1500	6	7,50	7	7,50
1750	5	8,75	5	8,75
2000	4	10,00	4	10,00
2500	2	12,50	2	12,50
3000	2	15,00	2	15,00
3500	1	17,50	1	17,50
4000	1	20,00	1	20,00

$f \leq L/200$
1 daN=1kg