

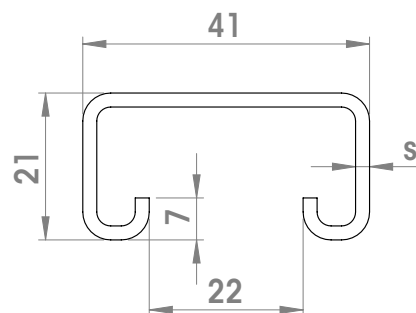


# PROFILI DI ANCORAGGIO

41/21

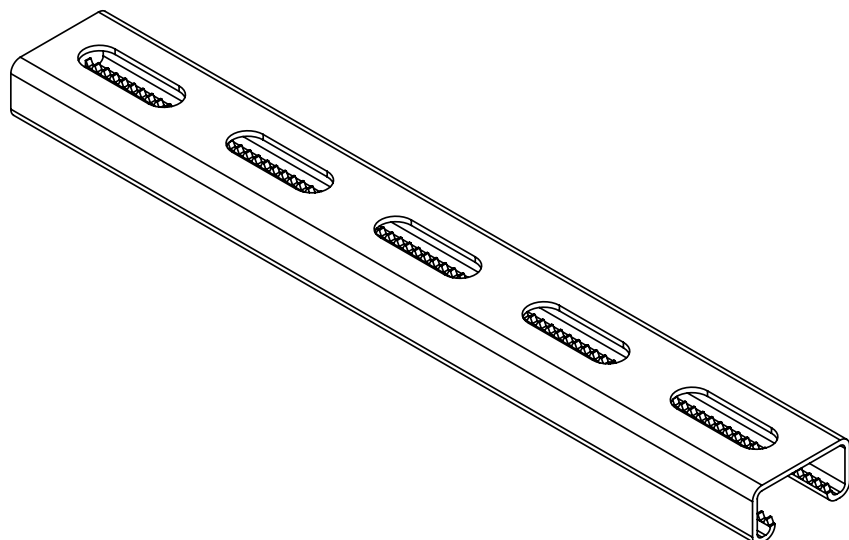

S	1,5 mm	2,0 mm	2,5 mm
A [cm <sup>2</sup> ]	1,29	1,67	2,01
I <sub>y</sub> [cm <sup>4</sup> ]	0,75	0,92	1,04
W <sub>y</sub> [cm <sup>3</sup> ]	0,76	0,93	1,07
σ <sub>amm.</sub> [N/mm <sup>2</sup> ]	200	200	200

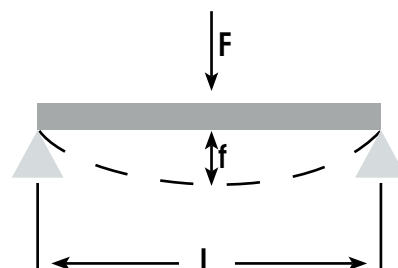

S	1,5 mm		2,0 mm		2,5 mm	
	F [daN]	f [mm]	F [daN]	f [mm]	F [daN]	f [mm]
L [mm]						
500	122	2,01	149	2,01	171	2,04
750	67	3,75	82	3,75	93	3,75
1000	38	5,00	46	5,00	52	5,00
1250	24	6,25	30	6,25	34	6,25
1500	17	7,50	21	7,50	23	7,50
1750	12	8,75	15	8,75	17	8,75
2000	9	10,00	12	10,00	13	10,00
2500	6	12,50	7	12,50	8	12,50
3000	4	15,00	5	15,00	6	15,00
3500	3	17,50	4	17,50	4	17,50
4000	2	20,00	3	20,00	3	20,00

f ≤ L/200  
1 daN = 1 kg