
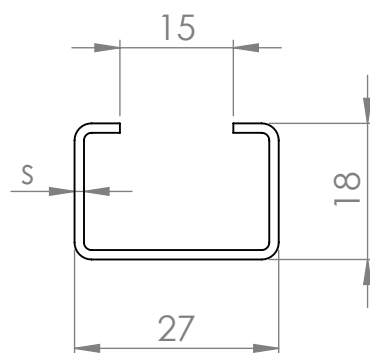


# PROFILI DI ANCORAGGIO

27/18

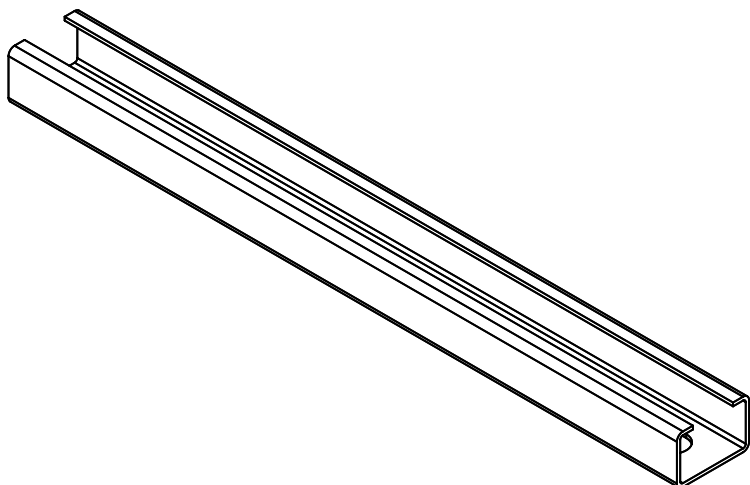

<i>s</i>	1,25 mm	
<i>L</i> [mm]	<i>F</i> [daN]	<i>f</i> [mm]
500	36	1,48
750	24	3,33
1000	15	5,00
1250	10	6,25
1500	7	7,50
1750	5	8,75
2000	4	10,00
2500	2	12,50
3000	2	15,00
3500	1	17,50
4000	1	20,00

$f \leq L/200$   
1 daN=1kg

<i>s</i>	1,5 mm
<i>A</i> [cm <sup>2</sup> ]	0,72
<i>I<sub>y</sub></i> [cm <sup>4</sup> ]	0,30
<i>W<sub>y</sub></i> [cm <sup>3</sup> ]	0,32
<i>amm.</i> [N/mm <sup>2</sup> ]	140

